
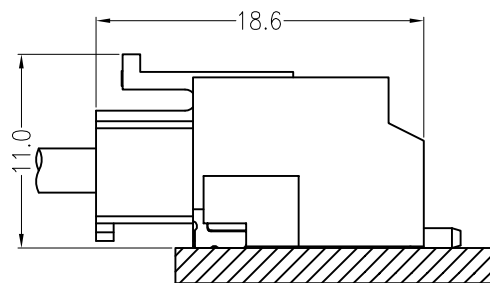



Specifications

Housing: PA9T Color: Nature
 Contact: Phosphor Bronze
 Operating Voltage: 250V AC/DC
 Current Rating: 7A AC/DC
 Withstand Voltage: 1500V AC/Minute
 Contact Resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 1000m\Omega$
 Operating Temperature: $-25^{\circ}C \sim +85^{\circ}C$

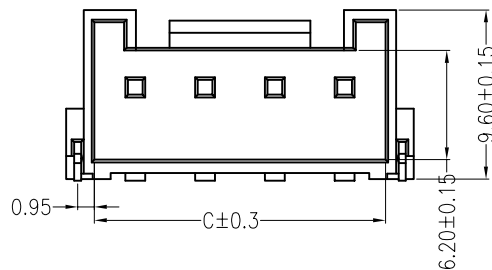

Receptacle+ Header

Pin	Dimensions (mm)			Pin	Dimensions (mm)		
	A	B	C		A	B	C
02	3.96	11.80	8.60	10	35.64	43.48	40.28
03	7.92	15.76	12.56	11	39.60	47.44	44.24
04	11.88	19.72	16.52	12	43.56	51.40	48.20
05	15.84	23.68	20.48	13	47.52	55.36	52.16
06	19.80	27.64	24.44	14	51.48	59.32	56.12
07	23.76	31.60	28.40	15	55.44	63.28	60.08
08	27.72	35.56	32.36	16	59.40	67.24	64.04
09	31.68	39.52	36.32				

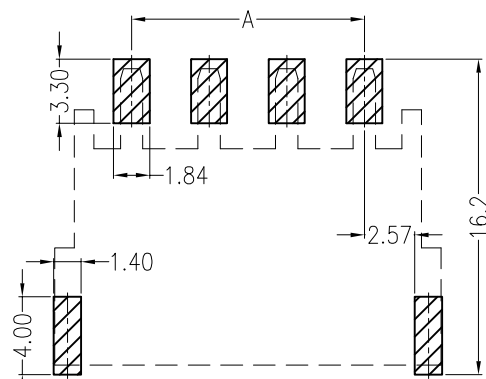

PCB LAYOUT

一般公差 TOLERANCES X. ± 0.40 .XX ± 0.20 .X ± 0.30 .XXX ± 0.10 ANGLES $\pm 2^{\circ}$		深圳市宏利电子有限公司 Shenzhen Holy Electronic Co.,Ltd	
检验尺寸标示 SYMBOLS \odot \ominus INDICATE CLASSIFICATION DIMENSION \odot MARK IS CRITICAL DIM. \ominus MARK IS MAJOR DIM.	工程 图号 VH396WB-nP	制图 (DR) '2016/6/16 审核 (CHKD)	
表面处理 (FINISH)	品名 VH3.96-nP 卧贴	核准 (APPD) Rigo Lu	
比例 (SCALE) 1:1	单位 (UNITS) mm	张数 (SHEET) 1 OF 1	尺寸 (SIZE) A4

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
-	-	-	-