
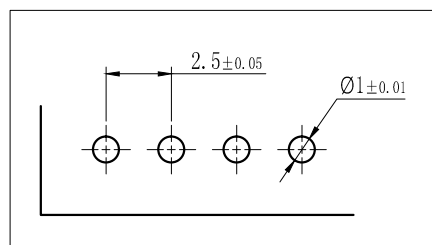
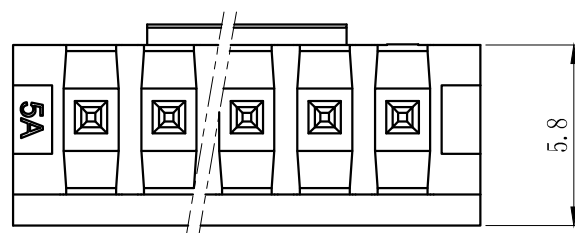
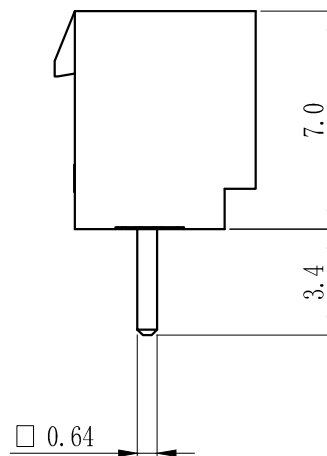


Specifications:
 Operating Voltage: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstand Voltage: 1000V AC/Minute
 Contact Resistance: $\leq 30\text{m}\Omega$
 Insulation resistance: $\geq 1000\text{m}\Omega$
 Operating Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

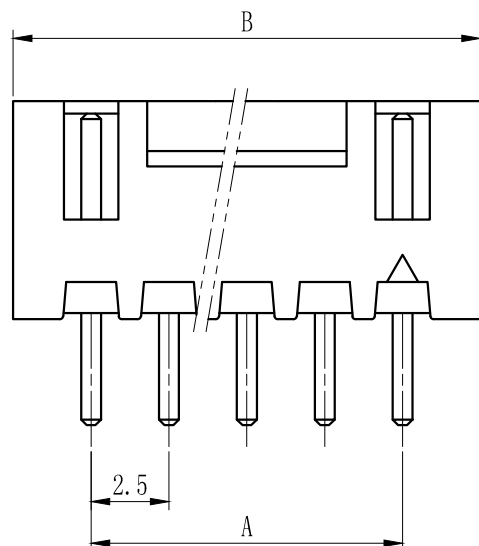

P. C. B LAYOUT

P数	尺寸 (mm)	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50

一般公差 TOLERANCES X. ± 0.40 .XX ± 0.20 .X ± 0.30 .XXX ± 0.10 ANGLES $\pm 2^{\circ}$			深圳市宏利电子有限公司 Shenzhen Holy Electronic Co.,Ltd		
检验尺寸标示 SYMBOLS \odot \ominus INDICATE CLASSIFICATION DIMENSION \odot MARK IS CRITICAL DIM. \ominus MARK IS MAJOR DIM.	工程 图号 XHB25-nA 品名 XHB2.5-nA 直针 TITLE XHB2.5mm Pitch A DIP CONN 表面处理 (FINISH)	制图 (DR) *10/03/22 审核 (CHKD) 核准 (APPD) Rigo Lu 张数 (SHEET) 1 OF 1 SIZE A4 REV 0			

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
-	-	-	-