

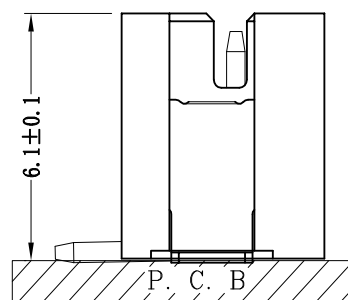


Specifications
 Housing: LCP UL94-V0 Color: Nature
 Contact: Phosphor Bronze
 Operating Voltage: 250V AC/DC
 Current Rating: 2A AC/DC
 Withstand Voltage: 800V AC/Minute
 Contact Resistance: $\leq 20\text{m}\Omega$
 Insulation resistance: $\geq 500\text{m}\Omega$
 Operating Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

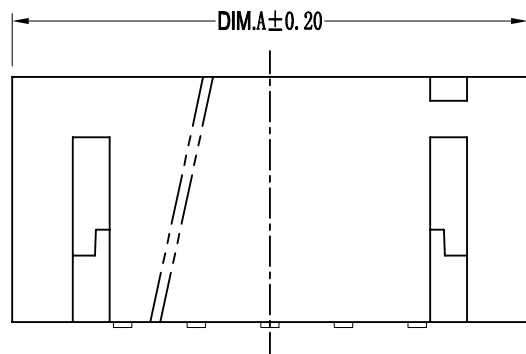

Assembly Layout

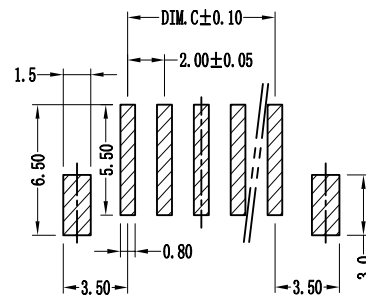

P.C.B Layout

CKT	DIM=A	DIM=B	DIM=C	CKT	DIM=A	DIM=B	DIM=C
2P	8.0	4.7	2.0	10P	24.0	20.7	18.0
3P	10.0	6.7	4.0	11P	26.0	22.7	20.0
4P	12.0	8.7	6.0	12P	28.0	24.7	22.0
5P	14.0	10.7	8.0	13P	30.0	26.7	24.0
6P	16.0	12.7	10.0	14P	32.0	28.7	26.0
7P	18.0	14.7	12.0	15P	34.0	30.7	28.0
8P	20.0	16.7	14.0	16P	36.0	32.7	30.0
9P	22.0	18.7	16.0				

一般公差
 TOLERANCES
 X. ± 0.40 .XX ± 0.20
 .X ± 0.30 .XXX ± 0.10
 ANGLES $\pm 2^{\circ}$

深圳市宏利电子有限公司
 Shenzhen Holy Electronic Co.,Ltd

检验尺寸标示
 SYMBOLS \odot \ominus INDICATE
 CLASSIFICATION DIMENSION

工程图号 PH20LB-nP 制图(DR) '08/5/16
 品名 PH2.0mm -nP 立贴 审核(CHKD)

\odot MARK IS CRITICAL DIM.
 \ominus MARK IS MAJOR DIM.

TITLE PH2.0mm Pitch LB FOR SMT CONN 核准(APPD) Rigo Lu

表面处理 (FINISH)

比例 (SCALE) 1:1 单位 (UNITS) mm 张数 (SHEET) 1 OF 1 SIZE A4 REV 0

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
-	-	-	-